


# The Arrow

## LPDA Antenna

BT974921

### One LPDA to Rule Them All, Powerful and Easy to Install - Meet The Arrow

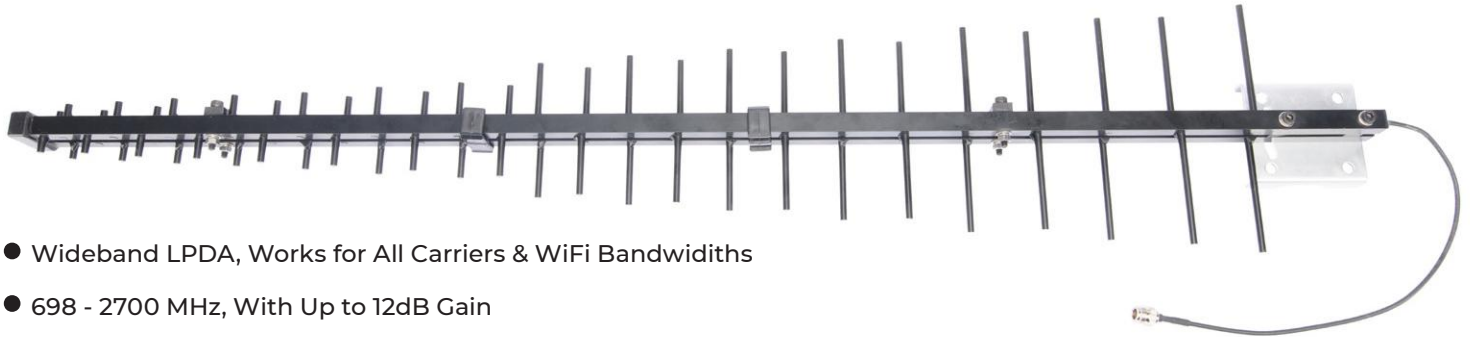


- Wideband LPDA, Works for All Carriers & WiFi Bandwidths
- 698 - 2700 MHz, With Up to 12dB Gain
- Easy installation, designed for 50 Ohm Systems

#### ELECTRICAL SPECS


Item No.	BT974921		
Frequency Range	MHz	698-960	1710-2700
Gain	dBi	12	12
Polarization	Vertical		
Beam width	Horizontal	55±5	
	Vertical	50±5	
VSWR		≤2.0	
Front-To-Back Ratio	dB	≥20	
Input Power, maximum	watt	50	
Impedance	ohm	50	

#### RADIATION PATTERNS

##### HORIZONTAL



##### VERTICAL



#### MECHANICAL SPECS

Connector Type	N-female		
Size W x H x D	mm, in	1100 x 200 x 47, 43.3 x 7.9 x 1.8	
Weight, without Mounting Kit	kg, lb	ø.94, 2.0	
Mounting Hardware	mm, in	ø38 ~ ø60, 1.5 ~ 2.3	
Reflector Finish	Aluminum		
Radome Material	Aluminum		
Operational Temperature	°C, °F	-40 ~ 60, -40 ~ 135	
Operational Humidity	%	< 95	



QUESTIONS? CALL US TODAY  
+27 (010) 157 0190

✉ sales@boltontechnicalafrica.com  
🌐 www.boltontechnicalafrica.com

